AJ48D ARTICULATED BOOM LIFT

The AJ48D is the most versatile access platform we've ever produced. With its market leading 48ft platform height and increased working envelope, no area is out of reach. The AJ48D also comes with JCB Livelink as standard, our industry-leading telematics solution.

HIGHLIGHTS

- A color base display provides key machine performance information.
- Intuitive controls give fatigue-free operator use.
- A USB port allows operators to charge mobile phones and other devices.
- An auxiliary handrail provides the operator with enhanced protection against crush injuries.
- 5-year structural warranty.
- Rough terrain solid tires are fitted as standard.
- Single-side service points and a swing out engine tray.
- Standard JCB LiveLink telematics.



HIGHER STANDARDS OF DESIGN

FAIRCHILD JCB


FAIRCHILDEQUIPMENT.COM/JCB

AJ48D SPECIFICATIONS

FAIRCHILD JCB

FAIRCHILDEQUIPMENT.COM/JCB

STATIC DIMENSIONS

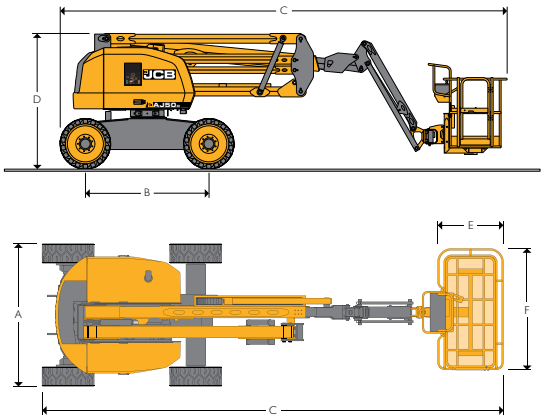

DIMENSIONS

	Weight	lbs	17383
A	Width	ft in	7' 5"
B	Wheelbase	ft in	6' 8"
C	Length (stowed)	ft in	24' 1"
D	Height (stowed)	ft in	7' 4"
	Tail swing	ft in	0' 5"
	Ground clearance	ft in	1' 0"
	Wheel loading (per wheel)	lbs	4345

PLATFORM

E	Platform length	ft in	2' 9"
F	Platform width	ft in	6' 0"
	Platform height	ft in	3' 7"
	Entry type		Gate
	Entry number		1
	Occupancy		2
	Capacity	lbs (kg)	551 (250)
	Rotation	degrees	160
	Crush protection — electronic		Std

ENGINE

Make		Kohler
Emissions compliance		T4F
Model		KD1903TCR
Entry Type		Gate
Power	hp (kW)	48 (36)
Rated Speed	rpm	2500
Fuel tank capacity	gal (litres)	15.6 (59)

ELECTRICS

System Voltage	V	12
Battery manufacturer		JCB
Battery model		Powermaster
Capacity	Ah	4.9
Auxilliary pump system		12V DC





THE JCB CONSTRUCTION RANGE

COMPACT EXCAVATORS

TELESCOPIC HANDLERS –LIFT & PLACE

TELESCOPIC HANDLERS –TOOL CARRIER

WHEELED EXCAVATORS

TRACKED EXCAVATORS

ELECTRIC SCISSORS

ROUGH TERRAIN FORKLIFTS

TELETRUKS

WHEEL LOADERS

TELESKIDS

SKID STEER AND COMPACT TRACK LOADERS

BACKHOE LOADERS